


# SVS CEILING LIFTS

For large & heavy projectors

# SVS 12HSE Series

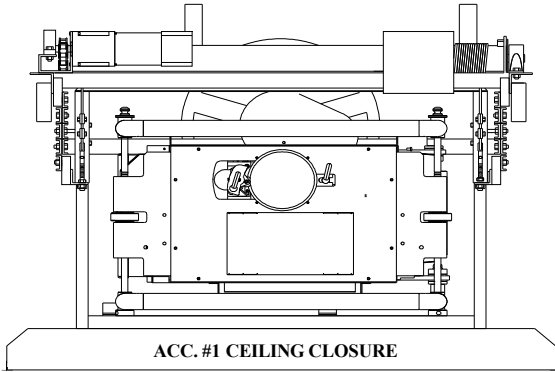

## PRODUCT FEATURES

- For "large projectors" requiring additional size and weight accommodations.
- Lowering distances from 24'9" to 33'8" [7.5 m to 10.3 m]
- Lifting capacity up to 900 lbs [408 kg]
- Three positions: Stored, Show (adjustable) & Service
- Supplied with 24VAC wall plate controller for low voltage control, two Accessory #7 video cable retractors & a removable #13 platform (to support the projector in an upright position)
- Very quiet operation
- Warranty: 5 Year parts, 1 year motor & 90 day factory labor

## SPECIFICATIONS

LIFT MODEL	MAXIMUM LOWERING DISTANCE	VERTICAL HEIGHT OF LIFT IN CLOSED POSITION	PHYSICAL DIMENSIONS		NET WEIGHT	ESTIMATED SHIPPING WEIGHT
			WIDTH	DEPTH		
12HSE-24	24'9" /7.6m	Vertical Height Varies with projector	44.25" /1124mm	65" /1651mm	410 lbs/ 185.9 kg	520 lbs/ 235.8 kg
12HSE-29	29'3" /8.9m				450 lbs/ 204.1 kg	530 lbs/ 240.4 kg
12HSE-33	33'8" /10.3m				470 lbs/ 213.1 kg	610 lbs/ 276.6 kg

(1) Vertical height may vary depending on height of projector. Supporting structure is additional

## STANDARD SPECIFICATIONS

**Voltage** 110v/220V, 60/50hz  
**Current Draw** 1.5 amps [110v], .75 amps [220v]  
**Control Voltage** 24 VAC (contact closure)  
**Materials** Steel/Aluminum/Nylon


## RECOMMENDED ACCESSORIES

**#1 Ceiling Closure** - Self-aligning closure system complete with ceiling framework. Supplied with 15/16" ceiling trim ring. Designed to accept ceiling tile or dry wall ceiling. Supplied unpainted.


**FP1 Ceiling Closure** -Fixed mounted flat closure panel-Lipped or Lipless. Supplied with 15/16" ceiling trim ring. Ceiling material attaches to the bottom of the panel or closure can be painted. Supplied unpainted.

**#2 Plenum Shroud** - Protective Metal cover for lift & projector in air plenum rated ceiling.


FRONT VIEW



SIDE VIEW

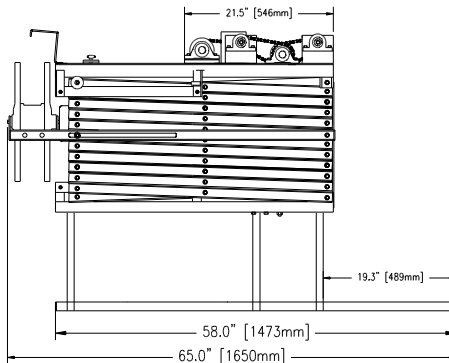

TOP VIEW

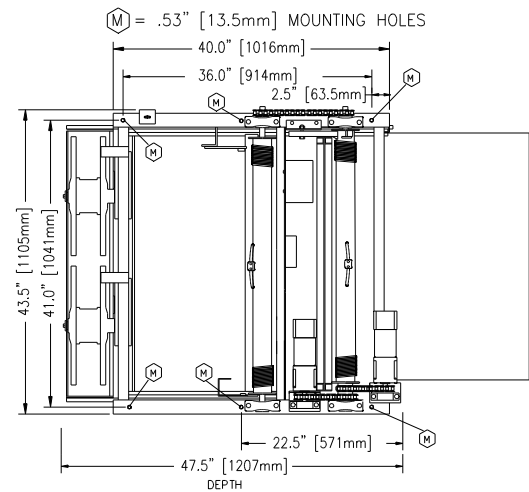

U.S. Patent No. 5,261, 645 & 5, 366,203

Eastern Sales/ Main Office  
 Tel: 850-522-4747  
 Fax: 850-522-4739

Western Sales Office  
 Tel: 928-774-4190  
 Fax: 928-774-4111

International Sales Office  
 Tel: 001-928-774-4190  
 Fax: 001-928-774-4111

www.svslifts.com  
 sales@svslifts.com