


SVS MINI 7 & MINI 7EX SERIES PROJECTOR LIFT WORKSHEET

(USED TO DETERMINE APPROXIMATE CEILING SPACE REQUIREMENTS)

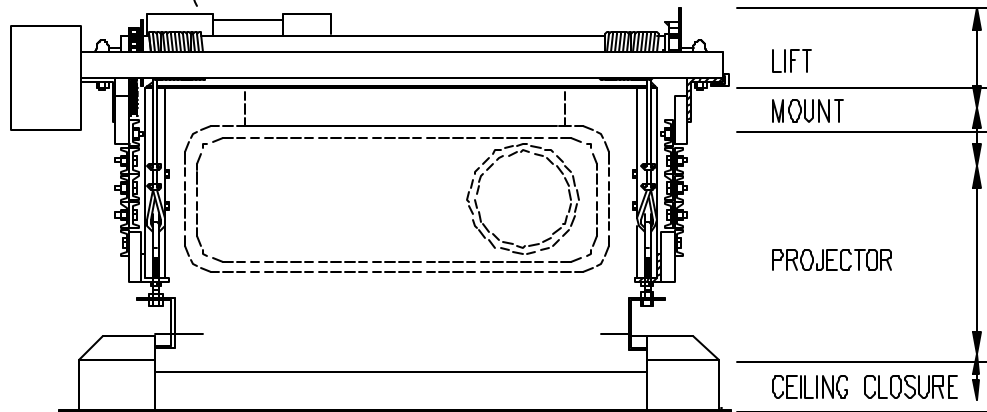

LIFT HEIGHT	
MINI 7-4: } MINI 7EX-4 }	16.00 INCHES [406mm]
MINI 7-6: } MINI 7EX-6 }	17.50 INCHES [445mm]
MINI 7-7: } MINI 7EX-7 }	19.00 INCHES [483mm]

	<u>COLUMN A</u>		<u>COLUMN B</u>
SVS LIFT ABOVE MOUNT HEIGHT	4.5 INCHES		
ADD SVS #9 MOUNT HEIGHT		CAN RANGE FROM 2 TO 4.5 INCHES. 3.5 INCHES IS STANDARD.	
ADD PROJECTOR/MONITOR HEIGHT		OVERALL HEIGHT OF PROJECTOR OR MONITOR BELOW #9 MOUNT.	
TOTAL HEIGHT OF LIFT, MOUNT, & PROJECTOR/MONITOR =		CONTINUE WITH HIGHEST NUMBER. IF EQUAL CONTINUE WITH COLUMN B.	
ADD SVS #1 CEILING CLOSURE, HEIGHT IS 1.5 TO 5 INCHES. 4 INCHES IS STANDARD.			
ADD 2 INCHES IF PLENUM SHROUD IS USED.			
TOTAL HEIGHT =		← CEILING SPACE CLEARANCE →	

* ALL DIMENSION ARE IN INCHES, UNLESS OTHERWISE INDICATED
 * SPECIFICATIONS & ILLUSTRATIONS ARE BASED ON INFORMATION AT TIME OF PRINTING.
 * THE RIGHT IS RESERVED TO MAKE CHANGES IN SPECIFICATIONS, MATERIALS, MODELS,
 AND APPERANCE OR TO DISCONTINUE MODELS AT ANY TIME WITHOUT NOTICE.
 * IF YOU HAVE ANY QUESTION OR NEED MORE INFORMATION PLEASE CONTACT SVS
 AT 850-522-4747 OR SALES@SVSLIFTS.COM

**TOTAL HEIGHT DOES NOT
 INCLUDE SUPPORT STRUCTURE
 FOR LIFT. (UNISTRUT, ANGLE
 IRON, THREADED ROD, ETC.)**

US PATENT # 5,261,645 & # 5,366,203